

Web Site: [www.advancedsurfaces.com](http://www.advancedsurfaces.com)  
2000 Banks Road • Margate, Florida 33063  
Decorative Concrete • Products & Systems

Broward: 954-973-4528  
Palm Beach: 561-243-0144  
Out-Of-Area: 800-952-5980  
Fax: 954-973-4926



**Portion Pak**

Epoxy Resin & Cure mixed with Solvent A will cover approx. 125 to 150 sq. ft.

**INSTRUCTIONS FOR RESEALING AND SECURING Epoxy Chattahoochee/Natural Stone With Two (2) Part Epoxy**



**Solvent A**

Chemical (Toluene) Solvent used to thin two (2) part Epoxy when used for sealing natural stones



**Solvent TG**


Blend of mineral spirits and toluene. Used for wiping the trowel when installing epoxy stone. Otherwise, the epoxy will stick to the trowel.

**Use this method of Cleaning & Sealing when there are loose natural stones to secure. Use Advanced Rock Glaze Sealer for basic Cleaning & Sealing Natural Stones.**

**PREPARATION & APPLICATION:**

1. Surface must be clean and dry (approx. 72 hours). Pressure cleaning is recommended.
2. Mark a line where the liquid Cure is filled in the container.
3. In a clean metal container pour the Resin and Cure together, mixing it approx. 3 minutes.
4. Using the Cure container that you marked, fill it to the line you marked with Solvent A.
5. Pour the Solvent A in with the Resin and Cure mixture and mix until liquid becomes clear.
6. Begin rolling it on the stone surface with a 3/4 inch roller cover.
7. **Mix only enough epoxy that can be successfully rolled on the surface within a 15 to 25 minute period.**  
Do not expose the resin and cure in the hot sun before mixing.
8. You should get approximately 125 to 150 sq. ft. of coverage per mix.
9. Allow to dry for a minimum of 24 hours prior to walking on the surface.

IF YOU ARE USING THE 5 GAL. ECONOMY EPOXY KIT USE THE APPROX. FORMULA BELOW:  
(Use the plastic measuring containers provided for an accurate measurement)

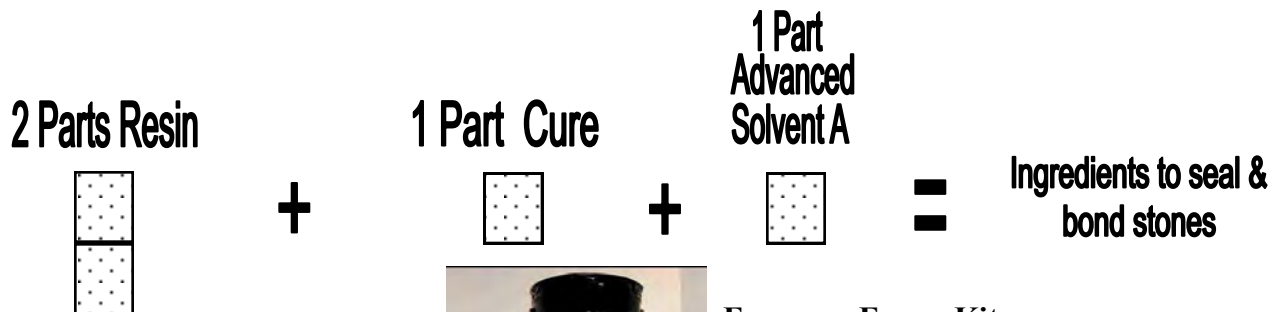

**Economy Epoxy Kit**  
**2 Resin & 1 Cure**  
(5 Gal. Containers)  
Equal to 16 Portion Paks

Mixes 2400 lbs (150 - 50 lb. bags) or  
1600 lbs (16 - 100 lb. Bags)

# Advanced Surfacing Systems

Pool Decks • Patios • Driveways • Walkways • Entranceways



## Advanced Surfaces Rock Glaze



1 Gallon

5 Gallon

- Urethane clear coating
- Resists ultraviolet rays

Natural Stone-Chattahoochee should be sealed every 10 to 12 months.

**ADVANCED  
SURFACES**  
INC.  
Since 1979

Showroom • Warehouse • Office  
2000 Banks Road • Margate, FL 33063  
Local: 954-973-4528  
Out Of Area: 800-952-5980  
Fax: 954-973-4926

Visit Us: [www.advancedsurfaces.com](http://www.advancedsurfaces.com)  
Email: [sales@advancedsurfaces.com](mailto:sales@advancedsurfaces.com)